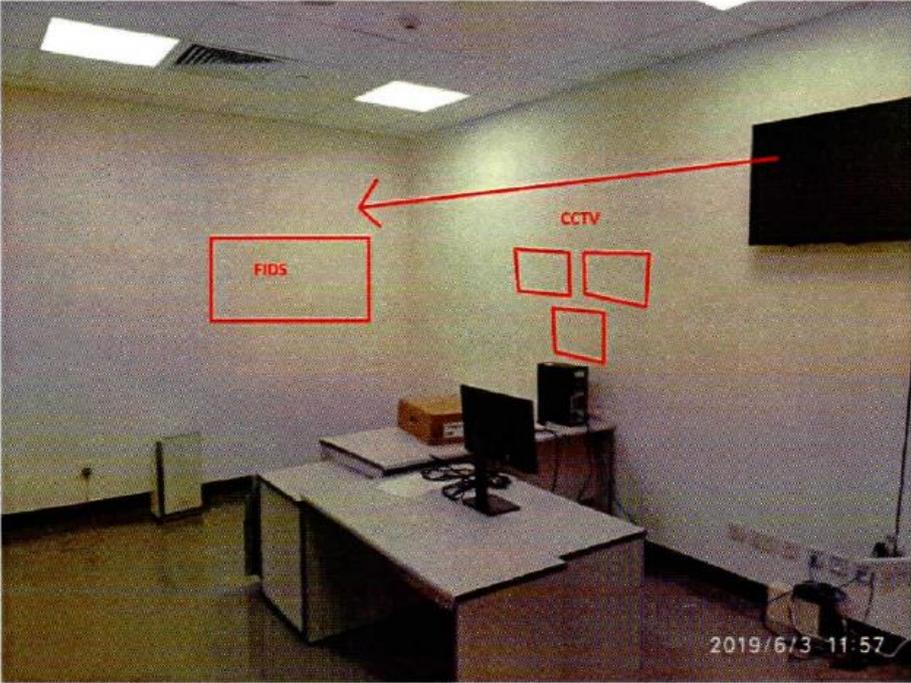
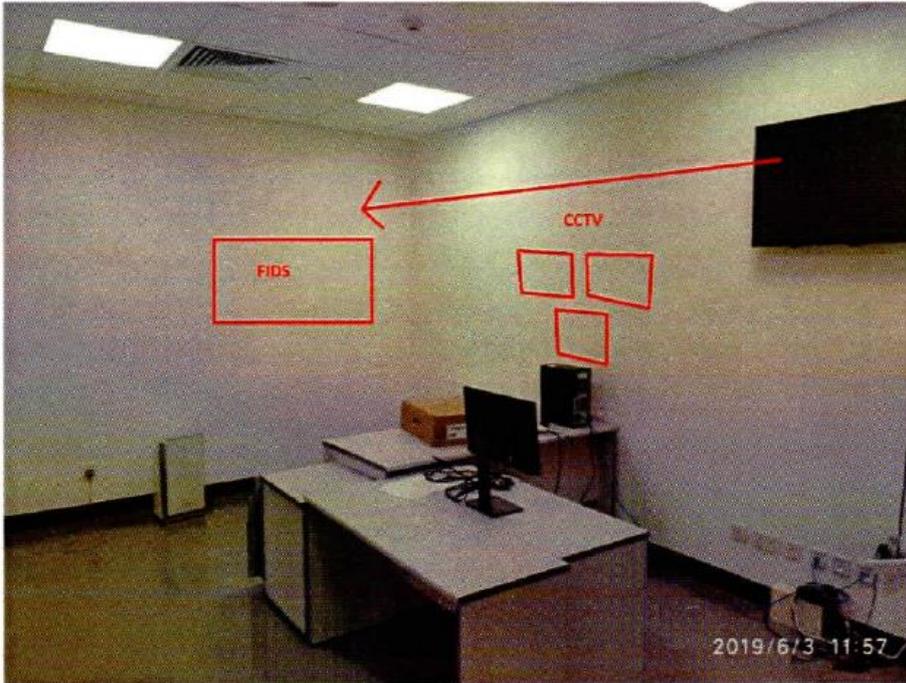


## Request for Quotation / 報價請求

Subject:	Cabling Work, EWR19082		
From/由:	Mr. Kim Wong / Patrick So	E-mail/電郵	kimwong@aims.com.mo
Tel/電話:	853-8598 8717 / 8898 2369	Fax/傳真:	853-8598 8711
Date/日期:	12-June-2019	Ref:	029-2019-Q

煩請按下列要求報價：

No.	Item / Model / Description	Qty.
1.	<p>To relocate 1 CCTV workstation with its mouse, keyboard, joystick, 2 decoders, 3 monitors and UPS in existing OPS office to new PTBNE OPS supervisor office. The display shall be mounted on the wall as show in Fig.1 and workstation shall be rack mounted in the ELV Room (RM 10-01-0052) including all cabling works with proper cable management, necessary network switches with appropriate patching and connectors, and provision of signal extenders and converters.</p> <div style="text-align: center;">  <p><b>Fig. 1</b></p> </div>	1
2.	<p>To relocated and configure the FIDS display in PTBNE supervisor office from one wall to another as show in Fig.1 including all cabling works.</p>	1



**Fig. 1**

To relocate the ATC clock system (Fig.2) from the ceiling of existing AIC office and mount to new PTBNE AIC office ceiling as shown in Fig.3. Extension of the LAN cables from LAN sockets to the clock display shall also be included.



**Fig. 2**


3.

1

4.

To relocate the biometric system from existing FIU office to new FIU Office. Cabling work might be acquired wherever deemed necessary

1

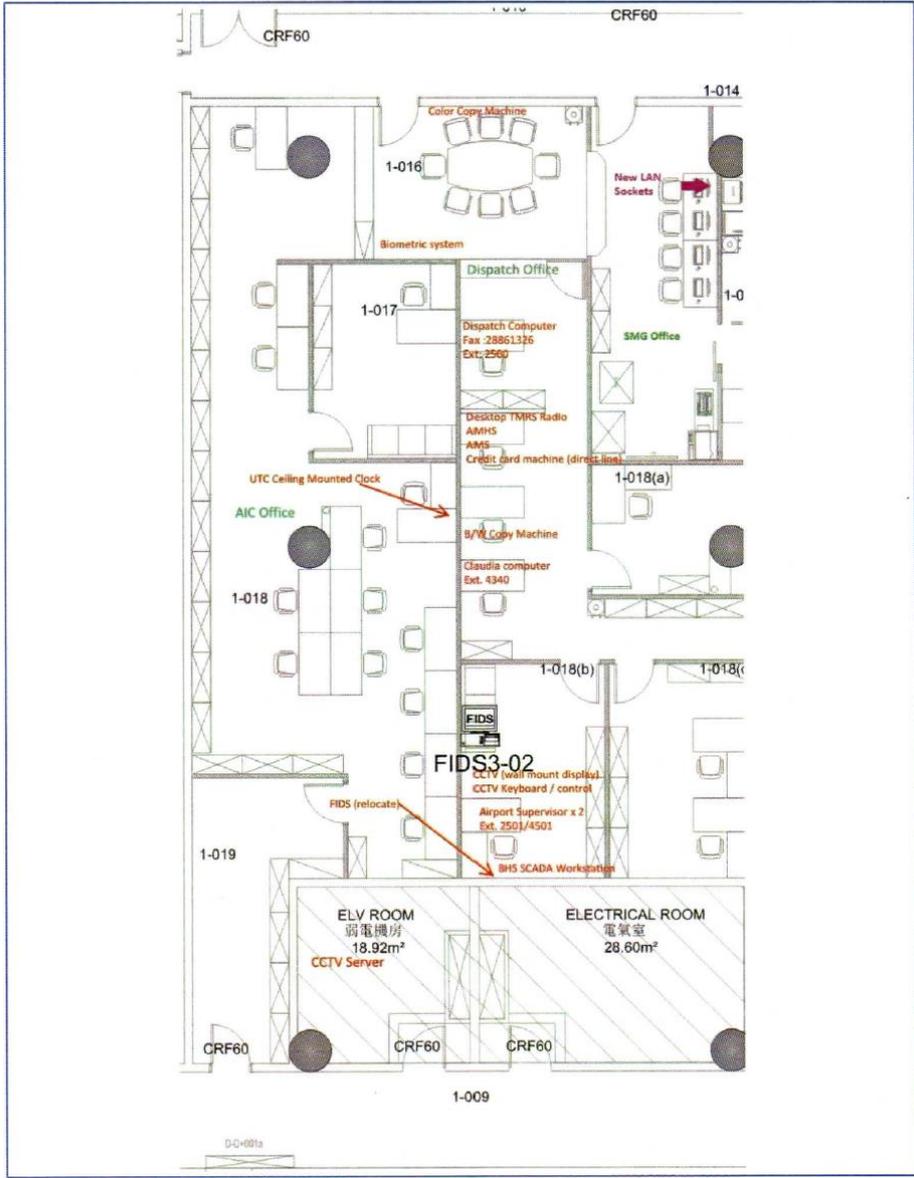5.	To install One 24-core fiber cable with patch panels from PTBNE Departure ELV Room (RM 10-01-0052) to PTBNE Arrival LV Room (RM 10-00-0012)	1
6.	To install Four CAT6 network cables and sockets in PTBNE SMG Office and connect to PTBNE Departure ELV Room (RM 10-01-0052)	1
7.	<p>To install Ten CAT6 Network cables with patch panels from PTBNE Departure EVL Room (RM 10-01-0052) to PTBNE Departure SMG ELV Room</p> <p style="text-align: center;"><b>Fig. 3 PTBNE FIU office layout</b></p> 	1

條款:

1. 報價時請列明所有條款
2. 報價請以澳門幣結算及付款方式
3. 註明完成項目週期